
MATERIALS | LEATHER

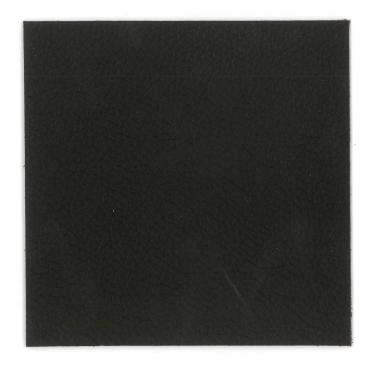

krug

SPECIFICATIONS

CROCKING	(ASTM D-5053) Wet: 4 Dry: 5		
ELONGATION AT BREAK	(ASTM -2211) 30-50% at 50 lbs.		
TEAR RESISTANCE	(ASTM-4705) 25 lbs.		
FLEXIBILITY	(ASTM D-2097) Pass		
ABRASION RESISTANCE	(ASTM D-3884) Pass		
FLAMMABILITY	Boston Fire Dept. Code (BFD 1x1) with Fire Blocker and/or Fire Barrier Cloth California Technical Bulletin 117 Cigarette Ignition Resistance (NFPA 260) California Technical Bulletin 133 with Fire Blocker and/or Fire Barrier Cloth Pass		
LEATHER CONVERSION TABLE		Leather 17 square feet 34 square feet 51 square feet 68 square feet 85 square feet 102 square feet 119 square feet 136 square feet 153 square feet 150 square feet 150 square feet	
CARE AND MAINTENANCE	Dust regularly with a clean, soft cloth. Regular cleaning with a soft, damp cloth is all that is needed to keep your leather beautiful. Should you need a more vigorous cleaning, use only a solution of mild soap and water. Blot gently; never rub aggressively. Never use a cleaner with solvents, alcohol, or wax. Should you use a leather cleaner, always test in a hidden area first.		
NATURAL CHARACTERISTICS	Healed scars, scratches, cuts and stretch marks are all natural markings and are characteristic of leather.		

krug

421 Manitou Drive Kitchener, Ontario, Canada N2C 1L5 solutions@krug.ca www.krug.ca 1.888.578.KRUG





Krug Leathers are genuine premium-grade European hides, with all the richness, warmth and sophistication that only real leather can provide. They have a subtle natural grain, and their exceptional durability gives many years of comfortable and pleasurable enjoyment.

